

PUMP INFORMATION

- Type: Sump Pump(s)
 Grinder Pump(s)
 Non-Clog Pump(s)

Model NO: _____
 Rating: _____ GPM _____ TDH
 Motor: _____ HP _____ RPM
 Elec: _____ PH _____ HZ _____ v
 Elec: _____ FL AMPS


DISCHARGE PIPE

- 304 Stainless Steel
 Sch40 Galvanized Steel
 Sch80 PVC Pipe

- 1 1/4"
 1 1/2"
 2"
 3"


- Anti-Floatation Flange
 Fiberglass Encapsulated
 ASTM A-36 Steel
 Round Fiberglass
 None

- 3/16" Lifting Chain
 304 Stainless Steel
 Galvanized Steel
 * Stainless Steel Cable
 is Available

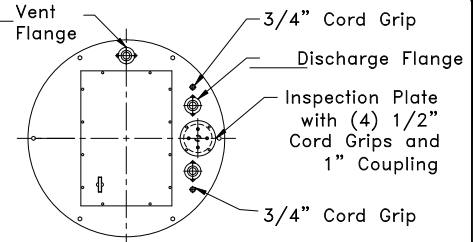

Gas Tight Hatch Cover

- Fiberglass Aluminum Steel

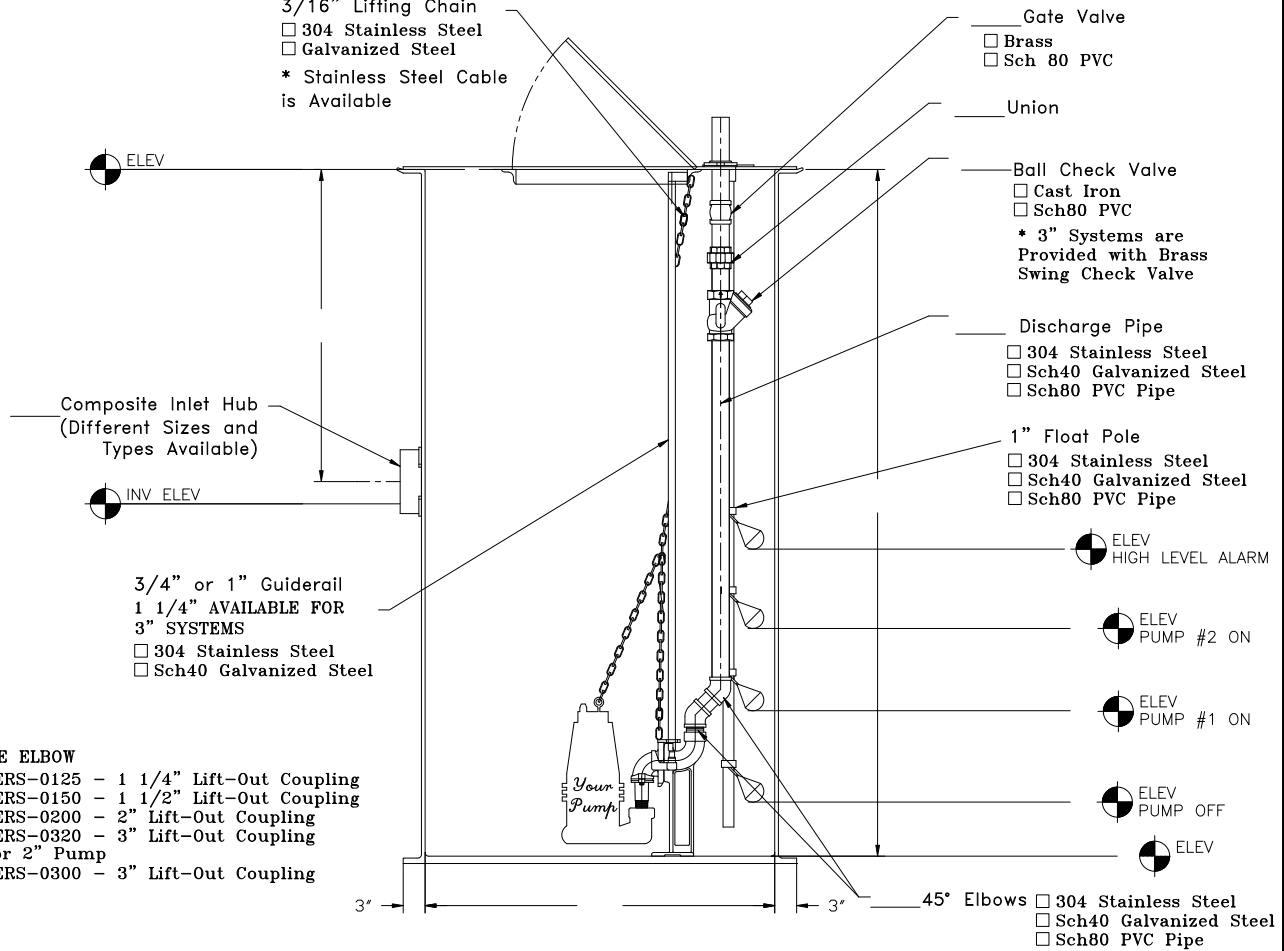

Composite Inlet Hub
 (Different Sizes and
 Types Available)

- 3/4" or 1" Guiderail
 1 1/4" AVAILABLE FOR
 3" SYSTEMS
 304 Stainless Steel
 Sch40 Galvanized Steel

BASE ELBOW

- BERS-0125 - 1 1/4" Lift-Out Coupling
 BERS-0150 - 1 1/2" Lift-Out Coupling
 BERS-0200 - 2" Lift-Out Coupling
 BERS-0320 - 3" Lift-Out Coupling
 For 2" Pump
 BERS-0300 - 3" Lift-Out Coupling

- 45° Elbows 304 Stainless Steel
 Sch40 Galvanized Steel
 Sch80 PVC Pipe



Prefabricated
 Fiberglass Lift Station
 Duplex - Top Discharge
 With Valves

Scale: None
 Drawn By: RM
 App'd By: .
 Date: 04/21/03

This print is and contains confidential proprietary information owned exclusively by TOPP INDUSTRIES, INC. It is furnished on a strictly confidential basis. This restriction includes, but is not limited to the condition that this print will not only be used as a record or to identify or inspect parts or for other information purposes and will not be used to manufacture or procure the manufacture of the items shown in this print by any other source than TOPP INDUSTRIES, INC.

Highway 25 North P.O. Box 420
 Rochester, IN 46975
 Phone: 800/354-4534 Fax: 574/223-6106

Supersedes Prints
 Prior To: 01/06/09

Reference
 No: 16735

Revisions

Δ	First Released.