

freeflo™

BASE ELBOW RAIL SYSTEMS



**We Are
Everywhere**



P.O. Box 420 • 420 St. Road 25 N
Rochester, IN 46975
Phone: 574-223-3681
Fax: 574-223-6106
e-mail: toppindustries@toppindustries.com

Toll Free: 800-354-4534
www.toppindustries.com



FREEFLO Base Elbow Rail Systems

Built to meet the engineered standards of municipal wastewater stations, FREEFLO elbows are designed to configure with nearly all submersible pumps in the market today. As the offering of FREEFLO elbows has expanded, so has our experience with thousands of quality installations. Continual expansion, innovative design, and stocked product for immediate shipment – this has become our reputation and we look forward to building on these commitments throughout the years ahead.



BERS-0125, BERS-0150, or BERS-0200

Standard Flange Available with 1.25", 1.50" or 2.00" SS Pump Adapter Flange

- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Compact Design for Easy Installation
- Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 200 lbs
- 2.00" Discharge



BERS-0125 CV, BERS-0150 CV, or BERS-0200 CV

Check Valve Flange Available with 1.25", 1.50" or 2.00" SS Pump Adapter Flange

- Includes Integral Check Valve in Pull-Out Flange
- Allows for Removal of Check Valve with Pump
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Compact Design for Easy Installation
- Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 200 lbs
- 2.00" Discharge



BERS-0125 EX, BERS-0150 EX, or BERS-0200 EX

Non-Sparking Bronze Flange Available with 1.25", 1.50" or 2.00" SS Pump Adapter Flange


- Non-Sparking Design
- Bronze Pull-Out Flange
- Bronze Lower Guide Rail Plate
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Compact Design for Easy Installation
- Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 200 lbs
- 2.00" Discharge



BERS-0300 V / BERS-0320 V

Standard Flange Available with 3.00" or 3.00" x 2.00" SS Pump Adapter Flange

- Designed for Vertical Discharge Pumps
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Compact Design for Easy Installation
- Guide Rail Pins Designed to Accept 0.75", 1.00", or 1.25" Rails
- Rated for Pumps Weighing Less than 400 lbs
- 3.00" Discharge

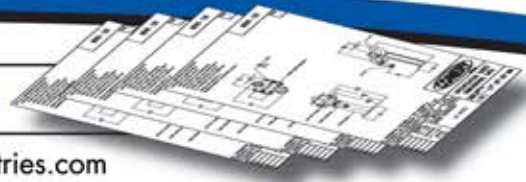



BERS-0300 H, BERS-0300 HEX, or BERS-0325 H

3.00" ANSI Pull-Out Flange Available Standard, Bronze or Adapter to 2.50"

- Designed for Horizontal Discharge Pumps
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Compact Design for Easy Installation
- Guide Rail Pins Designed to Accept 0.75", 1.00", or 1.25" Rails
- Rated for Pumps Weighing Less than 400 lbs
- 3.00" Discharge



BERS-0400, BERS-0400 HEX, or BERS-0430

4.00" ANSI Pull-Out Flange Available Standard, Bronze or Adapter to 3.00"

- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Guide Rail Pins Accept 1.50" or 2.00" Rails
- Metal to Metal Design with SS Break-Away Ring
- Available BUNA-N Break-Away Ring
- Available Heavy Duty Flange Gasket
- Rated for Pumps Weighing Less than 2000 lbs
- 4.00" Flanged Discharge



BERS-0600, BERS-0600 HEX, or BERS-0640

6.00" ANSI Pull-Out Flange Available Standard, Bronze or Adapter to 4.00"

- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Guide Rail Pins Accept 1.50" or 2.00" Rails
- Metal to Metal Design with SS Break-Away Ring
- Available BUNA-N Break-Away Ring
- Available Heavy Duty Flange Gasket
- Rated for Pumps Weighing Less than 4000 lbs
- 6.00" Flanged Discharge



UGB-STNLS/UGB-HDG/UGB-0150/UGB-0200

Stainless Steel or Galvanized Upper Guide Rail Brackets

- Designed for 0.75", 1.00", 1.25", 1.50" and 2.00" Guide Rail Pipes
- BUNA-N Guide Rail Stopper Grommet



IGB-0075 SS/IGB-0100 SS/IGB-0125 SS/IGB-0150 SS/IGB-0200 SS

Stainless Steel Intermediate Guide Rail Brackets for 0.75", 1.00", 1.25", 1.50" or 2.00" Rails

- Recommended for Every Eight Feet of Rail

freeflo™



HNB-0200

HNB Base Elbow Rail System Designed for Smaller Applications

- Strong construction to support small pump weight
- Simple mating design for ease of use
- Corrosion free thermoplastic, glass-filled material
- Rated for pumps weighing less than 75 lbs
- Compact design for use in smaller systems
- 2.00" discharge



POF-0200/POF-0200 CV/POF-0200 EX/POF-0300 V/POF-0320 V

POF-0300 H/POF-0300 HEX/POF-0325 H

POF-0400/POF-0400 HEW/POF-0430/POF-0600/POF-0600 HEX/POF-0640

Replacement Pull-Out Flanges Available for Every Base Elbow Rail System

- All Flanges Provided with Lower Guide Rail Plate and Standard Sealing Rings if Applicable
- 3.00" and Smaller Flanges Provided with Stainless Steel Lifting Eye Bolt



PAF-0125/PAF-0150/PAF-0200/PAF-0300/PAF-0320

Stainless Steel Pump Adapter Flanges Feature Unique 2-Piece Ring and Flange Assembly

- Available for 1.25", 1.50", 2.00", 3.00" or 3.00" x 2.00" Pump Discharge



SGV ADAPTER/HPG ADAPTER

Specialty Pump Adapter Flanges for Barnes™ SGV and Hydromatic® HPG Pumps

Call for more information

POK-0300/POK-0400/POK-0600/DFK-0400/DFK-0600

Flange Gasket Kits for Inlet or Discharge of 3.00"

Kits Include Stainless Steel Mounting Hardware



BERS-0400 RING SS/BERS-0400 RING BN/BERS-0400 RING HD

BERS-0600 RING SS/BERS-0600 RING BN/BERS-0600 RING HD

Alternate Sealing Rings for 4.00" and 6.00" Base Elbows

(Stainless Steel Ring Sold Standard with Elbows)

Available Stainless Steel Break-Away Rings, BUNA-N Sealing Ring or BUNA-N Heavy Duty Sealing Gasket

Replacement BUNA-N Sealing O-Ring Sets Available for All Applicable Models